

LIFEGUARD SAFETY SYSTEM

HYDROGEN HOSES | CRYOGENIC LIQUID CYLINDER HOSES | METAL PIGTAILS | LIFEGUARD COMPRESSED GAS HOSES | CARBON DIOXIDE BULK LIQUID TRANSFER HOSES

LifeGuard™ LPG Carousel Filling Hoses

The LifeGuard® Safety System is specifically designed to stop the flow of product in the case of hose failure. For carousel filling applications where automated filling can inadvertently result in coupling separation, the LifeGuard System can be the difference between safety and disaster.

Hose Data

Cover: Black, perforated neoprene


Reinforcement: Multi layers of synthetic fabric

Tube: Black Nitrile

Branding: Blue Mylar- LPG , 350 psi wp with impression brand to CGA

Temperature: -40 to 180 degrees F (-40 to 83 degrees C)

Maintenance: See LifeGuard Proper Use, Care & Maintenance Booklet Form# 2009-1

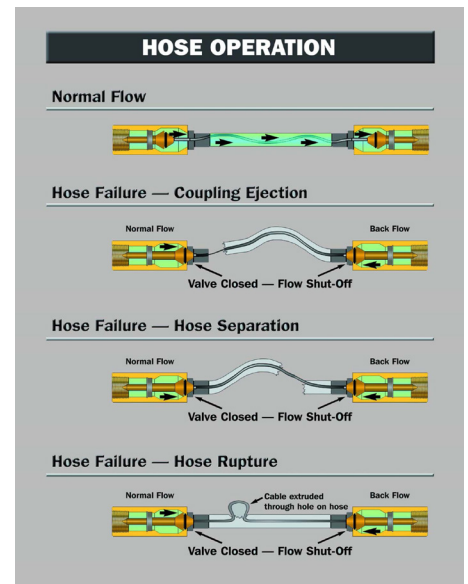

ID	WP	Hose	Coupling		Part #
	psi		Wt/Ft	Weight - plunger	
1/2"	300	.65 lb	.8 lb		LP06004160000
3/4"	300	.8 lb	1.6 lb		LP06006160000
1"	300	1 lb	2.5 lb		LP06008160000